


Reader Expansion Controller

RBH AX-NURC-2000 Series

2-door expansion controller, with a smaller footprint than the AX-NIRC-2000, for Axiom systems.

www.rbh-access.com

RBH AX-NURC-2000 SERIES

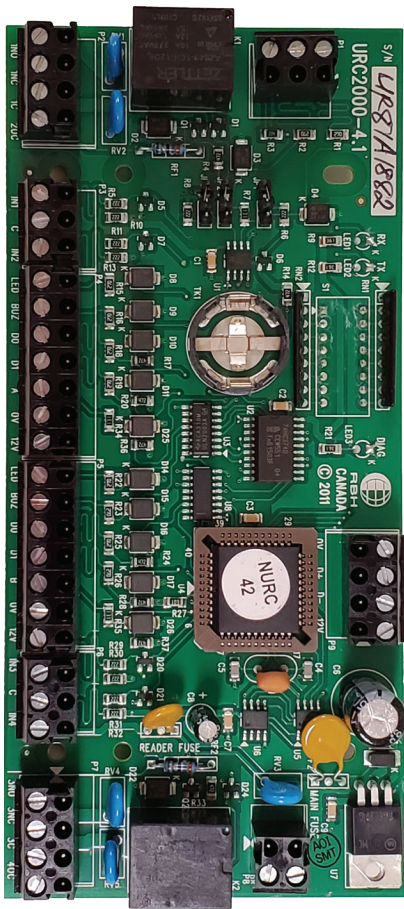

Specifications

NURC Panels per UNC-500 / AX-UNC100	3
NURC Panels per NC-100 (legacy)	4
D-Net Communications to NC-100	Supervised RS-485
Speed	38.4 Kbps
Distance	4,000 ft (1,200m)
Cable Type	18 AWG, 2 conductor, twisted, stranded, shielded
Access Points (Readers / Keypads):	2 with LED and Buzzer control
Distance	Max 500 ft (150 m)
Cable Type	20-22 AWG, 6 to 8 conductor, stranded, shielded
Programmable Supervised Inputs:	4
Input Supervision	For state monitoring (1 or 2 resistors)
Distance	Max 1,000 ft (300 m)
Cable Type	20 - 22 AWG, 2 conductor
Programmable Outputs:	2 SPDT 5A @ 30 VDC, dry contacts 2 Electronic drivers, 12 VDC max, 100 mA
Output Mode	Programmable Fail Safe / Fail Secure
Power Requirements	1.5A at 12VDC transformer (not included)
Simultaneous Card Formats per Panel	5, All Wiegand compatible readers supported
Recommended Back-up Battery	12 V, 7 AH lead, acid or gell cell (not included)



NURC-2002 includes one NURC-2002-B controller installed in an ENCL-1-PS enclosure as shown.



NURC-2004 includes two NURC-2002-B controller installed in an ENCL-1-PS enclosure as shown.

Compatible with




How to order:


AX-NURC-2002 Axiom compatible and pre-mounted in an ENCL1-PS enclosure

AX-NURC-2002-B Axiom board only

AX-NURC-2003-B Axiom board only for rack mount plate



NURC-2002-B Controller is designed for mounting in the standard ENCL-1 enclosure. LED's and DIP switch bank are mounted on the front of the controller board.



NURC-2003-B Controller is designed for mounting on a standard R2U rack mount plate. LED's and DIP switch bank are mounted on the back of the controller board.



NURC-2005 includes two URC-2003-B controllers installed on a R2U 19" rack mount plate as shown.



RBH Access Technologies, Inc.
2 Automatic Road, Suite 108
Brampton ON L6S 6K8, Canada

1-905-790-1515
1-905-790-3680

info@rbh-access.com

