


Reader Controller RBH-RC2M

The RC-2 Reader Controller is part of the Axiom line of access control products from RBH. Its versatile design features take care of present and future needs with ease and efficiency.

The RC-2 is one of the most rugged and reliable reader controllers on the market, with a multitude of built-in features found only in high end custom designed systems until now.

RBH-RC2M

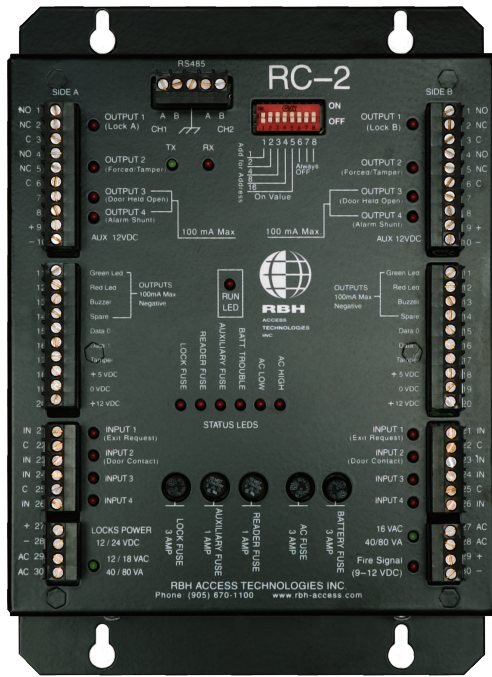

Multiple built-in, regulated power supplies

Independently fused electric lock, reader, auxiliary battery and AC Power, complete with fuse status indication and monitoring.

Supports fully supervised RS485 communications

Dual RS485 ports designed to ensure data communications integrity in the event of wiring short circuit or cut cable

Supports eight independent inputs with multi-level supervision

All inputs are fully programmable and can be configured for one, two, or no end-of-line resistor supervision. This allows the inputs to be used for any level of high security.

Supports two readers of ANY technology

Compatible systems include Proximity, Mag Stripe, Bar Code, Barium Ferrite, RF, Wiegand & Biometric

- Built-in lightning protection
- Plug-in terminal connectors
- Silk screened terminal legend
- 26 on-board diagnostic LEDs
- Field configurable I/Os
- Built-in fire signal supervision
- Built-in cabinet tamper
- Rugged metal case

Specifications

Power Requirements	1 x 16.5VAC 40VA transfmr. - controller & aux
Door Lock Power	1 x 12/18VAC 80VA transfmr. for up to 3A
Current Consumption	400mA max (controller)
Battery Charging Output	<ul style="list-style-type: none"> • Charging voltage 13.8V regulated • Built-in deep discharge protection • Dynamic load test
Recommended Back-up Battery	12V, 7AH lead acid or gel cell
Power Output to Reader	<ul style="list-style-type: none"> • 12V at 1A (fused) • 5V at 1A (fused) • Aux power: 12V at 1A (fused)
Fuses (Supervised)	<ul style="list-style-type: none"> • Battery: 3A • Reader Power: 1A • AC Power: 3A • Lock Power: 3A
Reader Connection	<ul style="list-style-type: none"> • Supports up to 2 readers (multiple format) • On-board reader tamper monitoring • Supports red and green reader LED outputs • Supports reader audible • Cable Type :20 - 22AWG 6 or 8 conductor stranded shielded • Cable Distance :Max 500ft (150m) (20AWG)
Outputs	<ul style="list-style-type: none"> • 4 x Form C relays, SPDT 2A @ 30VDC, dry contacts • 4 x electronic drivers, (max 100mA)
Inputs	<ul style="list-style-type: none"> • 8 x fully supervised circuits, 1, 2 or no EOL resistor (1K) • 1 x dedicated Cabinet Tamper Switch Input • 1 x dedicated Fire Alarm Input • Analog loop resistance measurement and reporting
Input/Output	<ul style="list-style-type: none"> • Cable Type: 20-22AWG, 2 conductor • Cable Distance: Max 1000ft (300m)
Communications	<ul style="list-style-type: none"> • Designation : D-NET • Speed: 38,400 bits/second • Ports: 2 x fully supervised RS485 ports • Circuit type: Ring (short or open circuit protection) • Cable Type: Shielded twisted pair 20 - 22AWG • Cable Distance: ~3,000ft (1,000m) between devices ~15,000ft (4,550m) total
On-Board Diagnostics	<ul style="list-style-type: none"> • Status : 8 x Output Status LEDs • 8 x Input Status LEDs • 1 x Fire Signal Status LED • Comms: 2 x RX, TX communication LEDs • 1 x Run LED • Power: 4 x On/Off Status LEDs • Fuses : 4 x Fuse Blown LEDs
Dimensions	9.75"H x 6.875"W x 3.25"D (25 x 18 x 10cm)
Operating temperature	0 to 70°C (35 - 150°F)
Operating Humidity	20 to 80% RH (non-condensing)

Order:
RBH-RC2M
RBH-RC2S (With Enclosure)



RBH Access Technologies, Inc.
2 Automatic Road, Suite 108
Brampton ON L6S 6K8, Canada

1-905-790-1515
1-905-790-3680

info@rbh-access.com

