




Biometric-QR recognition Reader  
**RBH-BFR-FACE25Q-DNB series**

Innovative system integrated Face readers by RBH are available with fingerprint reader, MIFARE, DESFire, NFC & Bluetooth (BLE) and QR recognition.

[www.rbh-access.com](http://www.rbh-access.com)

# RBH-BFR-FACE25Q-DNB SERIES

The BFR-FACE25Q-DNB facial reader delivers unmatched performance, user-friendly operation, and exceptionally fast processing and authentication speeds. This is made possible by its dual-camera system and IR technologies, ensuring outstanding accuracy. Compatible with other authentication methods such as fingerprint readers and QR code recognition, the BFR-FACE25Q-DNB is a versatile reader ideal for a wide range of environments.

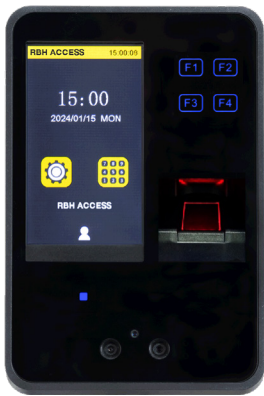

Multiple reading technologies

OSDP Ver 1 & 2

10,000 user face detection

Dual camera fast recognition

User friendly touch screen

Ultra fast fingerprint reader

Fully integrated with:



With the technology of:



How to order:

RBH-BFR-FACE25-DNB-D for sector  
RBH-BFR-FACE25-DNB-S for CSN

## Specifications

Processor	ARM based 32 bits
Verification mode	Face / Fingerprint / Pin code/ Card/ Mobile/QR
Face / Finger / Card capacity	10,000
System log	10,000
Web Base Management	Yes
Verification speed	< 0.5 second
Tamper	Yes
Scan distance	12 in (30 cm) - 31 in (80 cm)
Read Range	<b>CSN:</b> Keytag: 4" (100mm) - Card: 6" (150mm) <b>Sector:</b> Keytag: 1.5" (38mm) - Card: 3" (76mm) <b>NFC:</b> Keytag: 1.5" (38mm) - Card: 3" (76mm) <b>Bluetooth:</b> 30ft (9.14mt) <b>QR:</b> 4" (100mm)
TCP/IP	Yes (Static IP/DHCP (Client))
Integrated Reader	SECTOR / CSN for MIFARE Classic / Plus / DESFire EV1/2/3 (RBH-BFR-FACE-D for sector & RBH-BFR-FACE-S for CSN)
Communication / User Interface	
Communication method	TCP/IP, Weigand, OSDP ver. 1 & 2
Communication environment	LAN / WAN
Ethernet Interface	10/100M Base-T, Auto Crossover
Audible speaker	16 bits mono
TFT Color LCD	4.3 inches touch screen
Tamper	Yes
Electrical / Physical data	
Operation voltage	12V DC / 1.5A
Operation temperature	32°F (0°C) - 122°F (50°C)
Operation humidity	10% - 80%RH
Dimensions	4.8 x 7.5 x 2.8 inc (123 x 185 x 89 mm)
Weight	1.4 lb (590 gr)


\*Specifications are subject to change without notice.



RBH Access Technologies, Inc.  
2 Automatic Road, Suite 108  
Brampton ON L6S 6K8, Canada

1-905-790-1515  
1-905-790-3680

[info@rbh-access.com](mailto:info@rbh-access.com)



[www.rbh-access.com](http://www.rbh-access.com)