

Elegance Connectivity Functionality



The SS2014 PoE IP Keypad

The Safesuite Series of Controllers ushers in a new area in Security design and deployment. Combining Access Control, Burglar Alarm, Keypad Arming Stations and Monitoring functionality into an unprecedented Controller and complete security solution.... The SS2014 PoE Keypad!

The SS2014 is designed to fit into any Security application that requires Access Control and Burglar Alarm functionality such as Home, Small Business, Corporate, Industrial and Condominiums.

The unique design is optimized to leverage building infrastructure for a fast and economical deployment in the LAN/WAN environment. This negates the requirement to install a separate dedicated RS485 communication infrastructure saving time and money!

The Safesuite SS2014 is expandable and flexible with up to 256 alarm zones available to each keypad and an unlimited number of keypads there is never any need to install multiple Burglary controllers in a facility even if the buildings are not on the same property.

Packed with features such as built in Access Control , PoE Plus, Email notification , SMS notification, the SS2014 now defines the new standard in the Security industry.

For retrofitting existing buildings that already have proprietary wiring in place, the New SS2014 PoE Keypad includes a backwards compatibility channel to utilize the old wiring when LAN/WAN might not exist.

Complete with remote access via web or App this New Keypad/Access Control/Alarm Panel truly does have it all.


Axiom Local

Unlimited Keypads Complete Monitoring Complete Command Total Flexibility



TM


Pc - TCP/IP Cone Expanders Sc Inputs/Outputs 2 Port Reader Expanders 2 Port Reader Expanders 3 Partitions

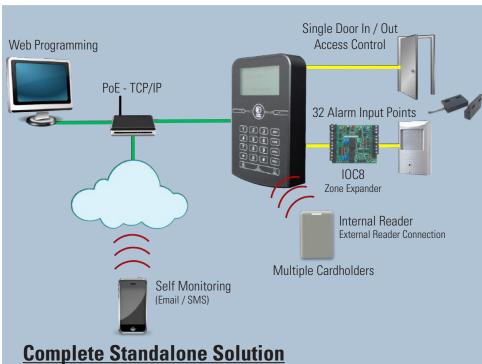

Homes · Apartments

Condominiums · Small Business

SafeSuite

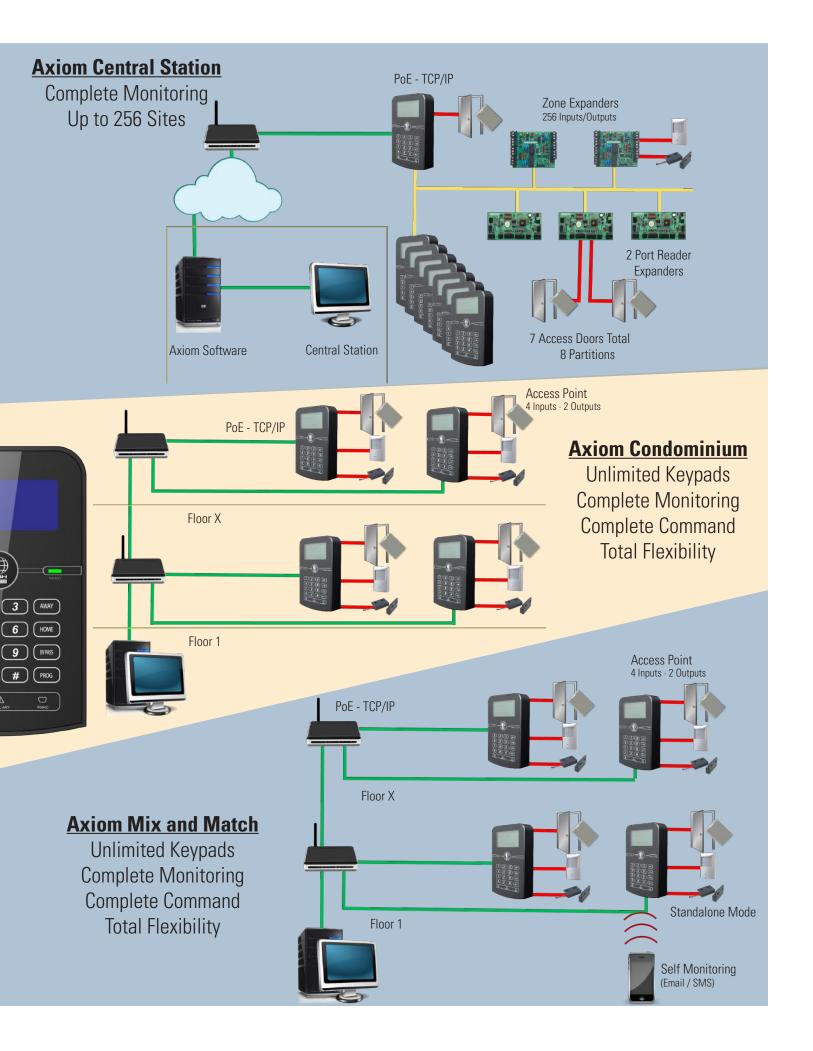

SafeSuite[™]

SS2014 PoE Keypad Specifications

Power :	+12V; 500mA
Display:	65 x 132 Dot Matrix LCD (8 lines with 22 characters assuming 5X8 characters
Keypad:	Capacitive touch with 19 keys (standard numeric inclusive)
Card Capacity:	50,000 Axiom modes / 500 Standalone mode
Inputs:	4 onboard inputs
Outputs:	2 onboard outputs
Zones:	32 for standalone Mode / 256 for Axiom Mode
Memory:	1 MB of memory for the card storage
RS-485 Channel:	1
RJ45:	PoE+
Weigand Reader Port:	1
Operating Temperature:	0 to 70C (32 - 158F)
Operating Humidity:	20 to 80% RH (non-condensing)
Dimensions:	9.4cm (3.7inches) W X 15.8cm (6.25inches) H X 3cm (1.18inches) D
Mount:	Standard Single gang Electrical Box



ACCESS

 $\ensuremath{\mathbb{C}}$ RBH Access Technologies, Inc. 2016